

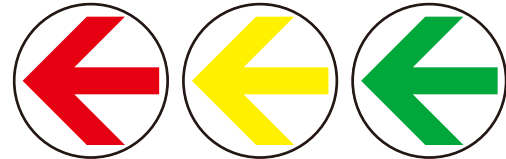




Arrow Signals

Specifications




- Operates at -40°C to +74°C.
- UV stabilized scratch resistant shell.
- Operating Voltage Range: 80V~250V.
- Moisture and Dust Ingress: Meet IP65.



Color	Model Number	Description	Size	Power Consumption (Watt)	Luminous Intensity (cd)
Green	TRA-G08DF-N2	8" Arrow	8" /200 mm	< 12	200
Amber	TRA-Y08DF-N2	8" Arrow	8" /200 mm	< 10	200
Red	TRA-R08DF-N2	8" Arrow	8" /200 mm	< 10	200

Specifications

- Operates at -40°C to +74°C.
- UV stabilized scratch resistant shell.
- Operating Voltage Range: 80V~250V.
- Moisture and Dust Ingress: Meet IP65.

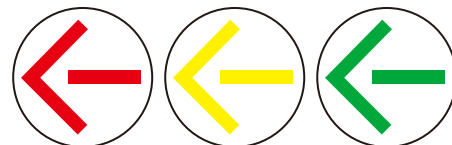

Color	Model Number	Description	Size	Power Consumption (Watt)	Luminous Intensity (cd)
Green	TRA-G12DF-T2	12" Arrow	12" /300 mm	< 10	150
Amber	TRA-Y12DF-T2	12" Arrow	12" /300 mm	< 9	150
Red	TRA-R12DF-T2	12" Arrow	12" /300 mm	< 9	150

Distributed by **FORTRAN** www.fortrantraffic.com

Central Office: 1-800-387-4555
Western Office: 604-502-9680

Headquarters

5F, No. 1, Creation Road II, Hsinchu Science Park,
Hsinchu, Taiwan 300, R.O.C.
Tel : 886-3-5679000 Fax: 886-3-5679999
E-mail: Service@eoi.com.tw <http://www.eoi.com.tw>

U.S. Office

1400 W. Lambert Road, Suite B,
Brea, CA92821, U.S.A.
Tel : 1-562-694-1246 Fax: 1-562-691-3087
E-mail: Sales@eoius.com <http://www.eoi-us.com>

China Factory

Lianxinfeng Opto. Co., Ltd.
Bldg. No. 15, Tongfuyu Industrial Park,
Longhua, Shenzhen, P.R.C.
Tel : 86-755-2814-0029 Fax: 86-755-2814-0027